

STATE BANK OF INDIA
INVITES ONLINE TENDER
FOLLOWED BY REVERSE AUCTION
FOR


PROPOSED FURNITURE WORK OF SBI MANDVI BRANCH (10995),
SAO-3, SURAT

PART – B (PRICE BID)

TENDER ISSUED TO



॥ निर्माण ॥

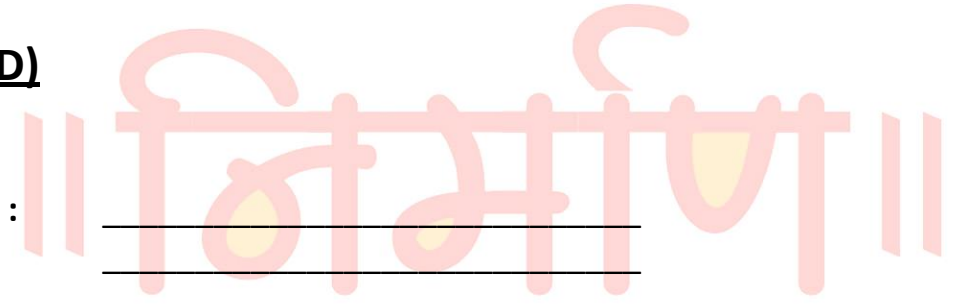

ARCHITECTS - INTERIOR DESIGNERS - PROJECT CONSULTANT

ARCHITECTS

:



ARCHITECTS

& INTERIOR DESIGNER

॥ निर्माण ॥

C-610, INTERNATIONAL TRADE CENTRE, (I.T.C.) MAJURAGATE,
BESIDE VISHWA-KARMA TEMPLE, RING ROAD, SURAT - 395002
Ph: 0261 -400 1070, 92274 40370 E- mail : ar.nirmaan@gmail.com

PRICE BID FOR PROPOSED INTERIOR WORK (LOOSE & FIXED FURNITURE) OF SBI MANDVI BRANCH (10995), SAO - 3, SURAT at SHOP NO 66 TO 68, LAXMI MARKET, OPP. BUS STAND, SUPRI VISTAR, MANDVI - 394160. (DIST : SURAT)

Sr. No.	Description	Quantity	Unit	Rate	Amount
Note : Rate should be inclusive of material, labour, tools, machinery, scaffolding, final disposal of debris, cleaning cutting wastage etc. All taxes, transportation etc. complete. (Excluding GST) GST will be paid as Applicable at the time of payment of Bills					
[A]	FURNISHING WORK				
1	SINGLE WINDOW COUNTER / CASH COUNTER SIZE 5'-0" X 2'-9" with White corian & blue lacquered glass finishing	4.60	R m		
	Supplying, fixing and keeping in position single window counter complete as per Bank's instruction made out of 18 mm thick commercial ply wood of approved make, complete with 19 mm. C.P. Teak wood lipping on all edges wherever required.				
	The cost shall be inclusive of S & F of a drawer unit or drawer & shelf unit with 18 mm thick commercial plywood and with approved make multipurpose Auto Lock in drawer and shelf unit. The cost shall also be inclusive of the following.				
[a]	size :				
	Description: L B Ht.				
	Writing Top 5'-0" 2'-9" 2'-6"				
	4 Drawers with				
	pigeon hole 2'-0" 1'-3" 2'-0"				
	Computer key Board with mouse				
	Supplying and fixing metal key Board of approved make in counter as per design and instructions.				
[b]	Working table top and edges shall be finished with 6 mm thick white corian of DUPONT or equivalent approved make as per Bank's direction with all labour and material.				
[c]	Front Apron : 2 nos 6 mm thick flexi ply wood in round shape with 6 mm thick white corian shall be provided at front as per design. All edges should be finished with corian of DUPONT make.				
[d]	Front panel shall be finished with 6 mm thick 18" high blue back painted glass of approved make and fixed on 18 mm thick commercial ply wood with Natural Silicon gum as per manufacturer's specification complete.				

[e]	Foot rest of 3" x 1.5" in C.P. Teak wood and CPU stand of 18 mm ply finished with 1 mm thick laminate of size 16" x 24"				
[f]	All wood work shall be lacquer polished to a smooth and uniform finish of choice colour and shade.				
[g]	All fittings like S.S. handle, Auto Lock to each drawer and cabinet doors, piano / auto hinges, ball catcher, stopper, metal cable manager etc. should be fixed of approved make.				
[h]	Heavy duty telescopic full extension sliding channel of approved make shall be used.				
[i]	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate of approved shade etc. complete				
[j]	Counter shall be made independent in Length of 5'-0" and properly placed between two partitions. Counter will be measured in RMtr between two partition and paid.				
	FINISHING DETAILS IN NUTSHELL:				
	1) Table Top : 6 mm thick white corian				
	2) Front Apron: Round corian and 6 mm thick back painted blue glass fixed with Natural Silicon				
	3) Facing of Drawers: 1.00 mm thick laminate finish				
	4) All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate				
	Only area between 2 partition will be measured for payment purpose. No extention on partition is payable.				
1[b]	Providing and fixing 12 mm thick Toughened Glass partition on counter top, front side as follows.	2.35	Sq m		
	Providing and fixing 12 mm thick Toughened float glass with polished edges to be fixed with necessary S.S Brush finish brackets & support on wooden partition as directed with necessary cut out in glass. All edges of glass shall have Diamond cut polished edges as directed.				
1[c]	Providing and fixing 12mm thick Toughened float Glass partition between Single Window counters as follows.	1.40	Sq m		

	12 mm thick Toughened clear float glass with polished edges shall be fixed with silicon and T.W beading support on wooden partition as directed. All edges of glass shall be Diamond cut polished edges as directed complete. Wooden partition will be paid separately. Maximum length and height will be measured for payment purpose.				
	TABLES				
2	MANAGER TABLE SIZE: 6'-0" X 2'-9" X 2'-6" HT. with 3.5 mm thick Teak veneer with PU coating finish on Table Top , sides & Edges and all other visible surfaces etc complete as follows	0.00	NO		
	Supplying and installation of Table as per the following description : Size 6'-0" x 2'-9". Table top shall be made from 18 mm thick commercial ply wood with 3.50 mm thick Teak veneer with PU Coating with necessary intermediate support. Table top shall be supported by 18 mm thick commercial ply wood with wooden framing. Storage cabinet of 1'-3" x 2'-0" x 2'-6" shall be provided using 18 mm thick commercial ply wood having 4 Nos drawers as directed with heavy duty telescope sliding channel of approved make , group lock, S.S. Handle. Computer Key board of metal of approved make shall be provided. Exposed surfaces of the CABINET shall have Teak veneer with PU polish . Foot rest of 1 1/2" x 3" T.W members shall be provided. All internal surface will have 0.60 mm thick balancing laminate				
	Apron (Modesty Panel) made from 18 mm thick ply wood finished with teak veneer PU Finish & groove pattern as directed.				
	Table side made from 18 mm thick ply wood with 3.50 mm thick teak veneer with PU coating finish shall be provided in a pattern as directed. Veneer to be provided on all visible surfaces.				
	Drawer Fascia made out of 18 mm thick Plywood. The sides/back/base of drawers be made of 12 mm thick Ply wood & Bottom of drawers shall be of 6 mm thick ply wood. fixing veneer on front side and all the internal surfaces shall be 0.60 mm thick balancing laminate. The drawers to be fitted with Telescopic sliding channel with SS Group locks of approved make and 100 mm long brush finish Stainless Steel handles for each drawer. All the edges of Drawer Fascia be provided with teak wood edge bending with laqucer polished etc complete as directed.				

	Table shall have stand for keeping CPU and metallic cable Manager shall be provided in table top. All exposed edges of plywood shall have veneer with smooth edges & corners				
	Exposed edges of Table Top, Leg panel & Side Shelf shall be made 36 mm thick by providing additional 18 mm thick ply wood patta of required width.				
	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate of approved shade. Etc. complete.				
	All the surface without teak veneer / laminate / balancing laminate shall be lacquered polished of approved shade				
	As per instruction of Architect/Bank work to be Completed.				
	FINISHING DETAILS IN NUTSHELL:				
	1) Table Top : 3.5 mm thick Teak Veneer with PU Coating & Burma Teak beading on Edges with PU Coating				
	2) Front Apron & Sides: 3.5 mm thick Teak Veneer with PU Coating				
	3) Facing of Drawers: 3.5 mm thick Teak Veneer with PU Coating				
	4) All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate				
2[a]	Same as above Item no-2, but size 6'-0" x 2'-9" all external surfaces including top to be finished with 1 mm thick Laminate (approved shades)	1.00	NO		
2[b]	Same as above Item-no-2 but Size: 5'-6" x 2'-6" with 4 Nos Drawer Unit with 1.0 mm thick Laminate finish on all exposed surfaces	2.00	NO		
2[c]	Same as above Item-no-2 but Size: 5'-0" x 2'-6" with 4 Nos Drawer Unit with 1.0 mm thick Laminate finish on all exposed surfaces	2.00	NO		
3	GRAHAK MITRA TABLE OF 2'-3" WIDE with PU coating finish	1.70	R m		
	Same as above item no 2 but Size 2'-3" wide with storage unit in Table with 4mm thick MDF board + Blue and white PU Coating finishing on all exposed visible surface as per instruction of Architect/Bank For Grahak Mitra/Tech Mitra (Help Desk Table)				
	Table top made from 18 mm thick ply wood + 4mm				

	thick MDF board with PU coating finish				
	Apron (Front side) made from 18 mm thick ply wood + 4mm MDF board with PU Coating finish				
	Both sides made from 18 mm thick ply wood + 4mm MDF board with PU Coating finish				
	3" thick Partition above working table top made from 18 mm thick+6 mm thick ply wood with necessary framing with 4mm thick MDF board + PU Coating finish as directed.				
	Exposed edges of Table Top shall be made 36 mm thick by providing additional 18 mm thick ply wood patta of required width.				
	Drawer Storage Unit- 1'-4" W x 2'-0" D, 2 Nos Drawer on top and rest 1 No shutter				
	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate				
	FINISHING DETAILS IN NUTSHELL:				
	1) Table Top : 18 mm Thick Plywood with 4 mm thick MDF with High gloss white PU Coating				
	2) Front Apron & Sides: 4mm thick MDF with High gloss white/blue PU Coating				
	3) Facing of Drawers: 1.0 mm thick Laminate finish				
4	DINING TABLE Approx Size 5'-0"/ 6'-0"x 3'-0"	1.45	Sq m		
	Supplying and installation of Dining Table of 2'-6" height, 1" x 1.5" ht. T.W beading shall be fixed on border. Top shall be made of 18 mm thick commercial plywood with additional 18 mm thick Ply wood patta of required width on edges with 1.0 mm thick laminate on top of approved shade and supports of the Table shall be made of 2" x 2" T.W. members in a Design as directed. All surfaces not laminated shall be lacquer polished.				
	Exposed edges of Table Top shall be made 36 mm thick by providing additional 18 mm thick ply wood patta of required width.				
5	CUSTOMER WRITING DESK	1.00	NO		
	Writing Desk Size 3'-0" L x 1'-3" x (0'-6"+3'-0") ht.				
	Vertical Sides and bottom shall be made out of 36 mm (2X18) thick Commercial plywood and back side 12 mm thick ply wood with Laminate on Top and Edges on all sides including inside divisions. Top shall be made from 12mm th Toughened glass with				

	polished edges making different divisions by 18 mm thick glass / plywood with laminate on both side for slips or forms as per instruction complete. Laminate to be provided on all visible surface.				
	SIDE CREDENZA (SIDE TABLE)				
6	Side Credenza Size 3'-3"x1'-4" x 2'-6"/3'-0" ht. Openable shutter with 3.50 mm thick Teak veneer with PU Coating finish on Top , front, sides, shutter and 35 mmx6 mm thick Burma Teak beading on Top Edges with PU Coating. Veneer to be provided only on visible surface etc complete as follows. Only Front elevation will be measured for payment purpose. (For BM) Rate for length Less then 3'-3" length	0.00	Sq m		
	Supplying and installation side cabinet for keeping computer and printer of size 1'-4" width 2'-6" height and 3'-6" length having openable shutters as directed. Cabinet shall be made from 18 mm thick commercial ply wood with 3.50 mm thick veneer with PU Finish. Back shall be made from 6 mm thick commercial plywood. Openable shutters shall be made from 18 mm thick commercial ply wood with veneer finished and approved make group lock, handle, hinges, magnet catch. , Rate includes all necessary provisions for installing computers. All the internal surface, back side shall have 0.60 mm thick balancing laminate ARCHITECTS - INTERIOR DESIGNERS - PROJECT CONSULTANT				
	Exposed edges of Sides, Table Top shall be made 36 mm thick by providing additional 18 mm thick ply wood patta of required width.				
	All the internal surface (non visible surface) shall be provided with 0.60 mm thick balancing laminate.				
6[a]	SIDE CREDENZA (SIDE TABLE) Same as above Item No-6, but all external surfaces to be finished with 1.0 mm thick Laminate (approved shades). Size shall be 3'-0"/3'-3" x 1'-4" x 2'-6" ht. with openable shutters as directed.	3.80	Sq m		
	FINISHING DETAILS IN NUTSHELL:				
	1) Top : Dark Laminate & Burma Teak beading on Edges with pilishade				
	2) Front Apron & Sides: Frosty White Laminate				
6[b]	SIDE CREDENZA (SIDE TABLE) WITH PARTLY DRAWERS Same as above Item No 6, but all external surfaces to be finished with 1.0 mm thick Laminate (approved shades). Size shall be 3'-0"/3'-3" x 1'-4" x 2'-6" ht. with Partly drawers & Partly openable	0.80	Sq m		

	shutters as directed				
	FINISHING DETAILS IN NUTSHELL:				
	1) Top : Dark Laminate & Burma Teak beading on Edges with pilishade				
	2) Front Apron & Sides: Frosty White Laminate				
6[c]	SIDE CREDENZA (SIDE TABLE) For S.W Counter Same as above item No-6 but Side Table Top and edges shall be finished with 6 mm Thick White Corian on Top and Edges. All other visible surface shall be finished with 1.00 mm th laminate. Size shall be 3'-0"x 1'-4"x2'-6" ht. With openable shutter as directed	2.28	Sq m		
7	STORAGE CABINET with Top & Front laminate finished. Storage of any height	29.00	Sq m		
	Other specification same as above Item No-6, but all external surfaces to be finished with Laminate (approved shades) & different size units as per site.				
	FINISHING DETAILS IN NUTSHELL:				
	1) Top : Dark Laminate & Burma Teak beading on Edges with pilishade				
	2) Front Apron & Sides: Dark Laminate/Frosty white Laminate as per design & instructions				
8	P/F ELECTRIC CUB BOARD	4.25	Sq m		
	Providing and fixing Electric cupboard using 18 mm thick Bison board for inside vertical division, shelves and shutter. Aluminum framing of 50x25x1.20mm thick with 6 mm thick Bison board on both side for outer partition with 1.0 mm thick laminate on all exposed surface and polishing/ synthetic enamel paint on all internal surface. Shutter will have approved make lock, handle, hinges, ball catches & S.S Perforated jali etc. complete as directed. Depth of cupboard will be around 1'-3". Height of shutter will be maximum 7'-0". Only Front elevation shall be measured for payment purpose.				
9	P/F PANTRY PLATFORM CUB BOARD SHUTTER	2.75	Sq m		
	Providing and fixing cupboard shutters below pantry platform using 1 1/2" x 2 1/2" second grade T.W members for frame, 18 mm Tk plywood with 1.0 mm laminate for shutters. Providing 1/2" th T.W beading all around shutter. Providing S.S hinges,				

	Handles, stoppers and magnetic catch as directed. All the without laminate surface shall be polished/ synthetic enamel paint as directed complete. Providing and fixing 0.60 mm thick balancing laminate on internal shutter surface				
	LOW HEIGHT PARTITION WORK				
10	P/F LOW HEIGHT BOTH SIDE LAMINATE PARTITION FOR BACK SIDE AND IN BETWEEN S.W COUNTER AND CASH CABIN WITH TOUGHENED GLASS	11.00	Sq m		
	Providing and fixing low height partition using 50mm x 25mm x 1.50mm thick Aluminium members maximum in grid of 2'-0" x 2'-0" fixing 12 mm thick MDF Board exterior grade / 6 mm thick ply of approved brand on both side of aluminium framing and fixing 1.0 mm thick laminate of approved shade on both sides, fixing 12 mm thick transparent toughened glass as directed. Applying polish on exposed steam beach members with lacquer polished edges as directed. Laminate to be provided only on visible surface.				
	For Low height Single window and Cash cabin partition, Average height of partition shall be measured and paid.				
11]	PROVIDING AND FIXING WICKET GATE WITH BOTH SIDE LAMINATE	2.30	Sq m		
	Same as item no 10 but P/F 30 / 32 mm thick flush shutter with both side laminate including SS hinges with countersunk SS screws, Approved make Night latch Lock, S.S Handles, Door stoppers, doorstep etc complete as directed.				
12	P/F LOW HEIGHT BOTH SIDE LAMINATE PARTITION WITH CLEAR FLOAT GLASS	4.50	Sq m		
	Providing and fixing low height partition using 50mm x25mm x 1.50mm thick Aluminium members maximum in grid of 2'-0" x 2'-0" fixing 12 mm thick MDF Board exterior grade / 6 mm thick ply of approved brand on both side of aluminium framing and fixing 1.0 mm thick laminate of approved shade on both sides. Fixing 12mm thick free clear float glass as directed. Applying lacquer polish on exposed steam beach members / edges as directed. Laminate to be provided only on visible				

	surface Providing pinup board of soft board covered with fabric and fixed in partition as per design/instruction complete as directed.				
	FULL HEIGHT PARTITION WORK				
13	P/F BOTH SIDE LAMINATE SOLID/ PARTLY GLAZED FULL HEIGHT PARTITION WITH DOOR	41.00	Sq m		
	Providing and fixing both sides laminate full height partly glazed partition using 50mm x 25mm x 1.50mm thick Aluminium members in a maximum grid of 2'-0" x 2'-0" fixing 12 mm thick MDF Board exterior grade / 6 mm thick ply on both sides, 1.0 mm laminate of approved make shall be fixed on MDF / plywood. Providing and fixing 5.0/8.0 mm thick float glass as directed in the partition. Providing and fixing door shutter using 32 mm thick flush shutter both side laminated and fixing 6 mm thick glass with beading patti, 5" Long 3 Nos stainless steel hinges, doorstop shall be provided as directed. Godrej Mortise lock shall be provided in door shutter. All visible members if not laminated shall have lacquer polished as directed.				
	For purpose of payment partition height up to bottom of false ceiling only shall be measured and paid . No extra payment shall be made for members going up to slab/beam bottom.				
14	Providing and Fixing Partition For Server Room/UPS Room Same as above item no 9 but Providing both side 8 mm thick Hilux board over aluminium framing with plastic paint of approved make & specifications etc complete as directed.	1.00	Sq m		
15	Providing and fixing Isolated flush door shutter (Partly Glazed and Partly Laminate) with frame as follows.	1.95	Sq m		
	Providing and fixing 4"x2" steam beach member for frame and Flush door shutter made out of 32 mm thick flush door with 6 mm thick clear float glass vision panel secured with 12 mm thick steam beach beading, 32 x 12 mm thick steam beach periphery patti around shutter edges, 1 mm thick laminate on both sides, 35x12mm thick steam beach stopper patti on frame including 3 Nos 5" long SS hinges with countersunk S S screws,				

	Approved make Dead Lock, S.S Handles, 150 mm long Door stoppers, doorstop of approved make etc. All exposed surface /edges not laminated be provided with lacquer polish. Work to be completed as per instructions.				
16	Providing and fixing UPS door shutter with Aluminium Frame and both side Hilux sheet	1.95	Sq m		
	Providing and fixing door shutter made out of 50x25x1.5mm thick aluminium framing at maximum 1'-6" C/C both way with 8 mm thick Hilux Board on both side with painting. Providing 6 mm thick clear float glass vision panel secured with 12 mm thick steam beach beading. Steam beach beading of size 31x 12 mm should be placed around shutter edges, aluminium stopper patti on frame including 3 Nos 5" long SS hinges with countersunk SS screws, Approved make Dead Lock, S.S Handles, Door stoppers, doorstopper to be fixed as per instructions. All beadings should be polished.				
	GLASS DOORS AND PARTITIONS				
17	PROVIDING AND FIXING 12 MM THICK TOUGHENED GLASS DIAPHARM FOR SEPARATING TWO M/C FOR E-LOOBY	3.75	Sq m		
	P /F 12mm th Toughened glass Diapharm between two machines with etching and frosting Films complete as directed. Glass edges shall be round moulded and polished as per direction. Glass shall be fixed in wall and floor with necessary suitable patch fittings as directed. (Area based on outer diameters shall be measured and paid).				
	PANELLING WORK				
18	P/F Wall paneling with laminate finishing for wall and Pillar etc	38.00	Sq m		
	Providing and laying paneling on walls & pillars having 12 mm thick MDF Board exterior grade / 6 mm thick ply and 1.0 mm th laminate fixed on wall & pillars with Aluminium. framing of 25mmx25mmx1.20mm thick at maximum 2'-0" c/c bothways on wall and pillar etc complete as directed as per design and instruction of Architect. .				

19	Providing and fixing 18 mm thick plywood of 4" height with 1.0 mm thick laminate finish runner patta on Storage Top / Table Top if required.etc complete as directed.	1.00	R m		
20	Creating Box for fixing AC machine and concealing of copper and drain pipe and around front side main entrance door top, jambs using 18 mm thick MR Grade plywood with 1.00 mm Thick Laminate to be fixed over aluminium framing of 25 X 25 X 1.2 mm as per requirement etc complete as directed.	4.50	Sq m		
21	Providing and fixing 8mm thick MDF Board exterior grade with jali work with high gloss PU coating over central column having 8mm thick MDF Board Exterior grade covered with 1 mm thick blue glossy laminate fixed on pillar with aluminium framing of 25mm x25mm x1.20 mm thick at maximum 2'-0" c/c bothway as per direction with all labour and material etc complete (Rate shall be including CNC cutting jali work and 1 mm thick blue glossy laminate behind design jali work as directed)	1.00	Sq m		
22	Same as above but Providing and fixing 8mm thick MDF Board exterior grade with jali work with high gloss PU coating paint over existing laminate central column as per direction with all labour and material etc complete (Rate shall be including CNC cutting jali work and 1mm thick blue gloss laminate behind design jali work as directed)	1.00	Sq m		
23	Paneling for Display wall with 3M Vinyl glossy Film with printed design Providing and laying paneling on wall having 8 mm th MDF Board exterior grade with 3M vinyl glossy films with printed design fixed on wall with Aluminium framing of 25mmx25mmx1.20mm thick at maximum 2'-0" c/c both ways etc. complete as directed. paneling as per design and instruction of Architect. MDF board to be finished with 0.60 mm thick laminate or paint before laying 3M film. Only Front elevation area shall be measured for payment purpose.	1.00	Sq m		
	Exposed edges of Display wall four side shall be made 36 mm thick by providing additional required thickness MDF patta of required width.				

24	Paneling for Digital wall with Blue / white high gloss PU Coating finishing	4.75	Sq m		
	Providing and laying paneling on wall having 8mm th MDF Board exterior grade with PU coating fixed on wall with Aluminium framing of 25mm x 25mm x 1.20 mm thick at maximum 2'-0" c/c both ways etc. complete as directed. Only finished visible surface area shall be measured for payment.				
25	Same as above item, Paneling for Digital wall but using 12mm thick MDF board / 6 mm thick ply without laminate finishing if required for wall paper fixing.	7.00	Sq m		
26	P/A WALL PAPERS on Digital wall	7.00	Sq m		
	Providing and applying Wall paper approved by Architect / Bank's Engineer having basic price of Rs 100=00 Per Sq. Ft				
27	ALUMINUM COMPOSITE PANEL FOR FRONT SIDE ELEVATION for BRANCH AND ATM ROOM IN SIDE WALL AND OUT SIDE	41.00	Sq m		
	Providing and fixing 3 mm thick aluminium composite panel of Flexi Bond / Euro Bond / Timex with 0.25 mm foil with 50 mm x 25 mm x 1.20 mm thick aluminium hollow section tray system with minimum 20 mm bending with silicon Dow Coming of GE seal proof - ACP of approved indian make complete as per selection and direction of Architect for front facade for the building. This item will be carried out as per manufacturer's specifications. Rate also includes providing trap door shutter with hinges, stoppers etc complete as directed. Design as per Bank and Architect's instructions etc complete. TIMEX - DIAMOND WHITE - 111, NAVY BLUE - 117 or equivalent				
	FALSE CEILING WORK				
28	P/F GYPSUM BOARD FALSE CEILING	80.00	Sq m		
	Providing and fixing Gypsum board 12.50 mm thick false ceiling in steps and design using Original Indian Gypsum board with original GI sheet section of Gypsteel ULTRA (Gypsteel Ultra shall be used) supporting system in line and level. Finishing the surface and applying 3 coats of Plastic emulsion				

	paint as directed complete. Entire work to be done as per standard specifications of Saint Gobin Gyproc India.				
	After completion of work, certificate from Saint Gobain Gyproc Company shall be submitted along with bill stating that work is satisfactorily completed as per their specification.				
	Note : (1) Rate includes making necessary cut-outs for lighting fixtures (2) Pattas if any shall be measured in SqM and not in Rmt and paid in SqM (3) Only finished visible surface area shall be measured for payment.				
29	Same as above item but providing and fixing of 8 mm thick Hilux board false ceiling instead of Gypsum Board for Item No-13 etc complete as per design and instruction. Only finished surface area shall be measured for payment.	2.95	Sq m		
30	Same as above but providing and fixing of 8 mm thick MDF board strip with Blue shade high gloss PU Coating instead of Gypsum Board for Item No-1 over Transaction Area etc complete as per design and instruction. Only finished surface area shall be measured for payment.	2.00	Sq m		
30[a]	Same as above but providing and fixing 6 mm thick ply covered with 1 mm thick blue shade laminate	1.00	Sq m		
31	Providing and Fixing of Armstrong Mineral Fiber Acoustical Suspended ceiling system with FINE FISSURED (MICRO LOCK) EDGE TILES With Armstrong Silhouette Exposed Grid	40.00	Sq m		
	Using Silhouette Grid with Fine Fissured microlook Edge Tiles. With necessary Angles at junctions as per company specifications as directed complete. Rate includes necessary cut outs for A/C Grills, diffusers light fixtures complete as directed. Cutout for light and Diffusers will be deducted from area. Only Tiles cost will be deducted for payment purpose				
	After completion of work, certificate from Company to be obtained and submitted with bill that work is carried out as per their specifications				
32	SOFT BOARD	5.00	Sq m		

	Providing & fixing soft board for pin up using moulded Steam beach frame of 1" x 1/2" with 6 mm thick commercial plywood on back side and 12mm thick soft board on front covered with cloth of selected design of Basic rate of Rs. 150 per R m. Steam beach member shall have lacquer polish as directed.				
33	Supplying and fixing Roller Blind Blackout of approved make with selected fabric of approved design and shade. (Basic Price of Rs 135=00 Per Sq. Ft Including GST)	6.00	Sq m		
34	Providing and Fixing Frosted polyster film of 3M (Scotchcal 7725 - 324) or equivalent make over glass surface as per direction with all labour & materials to the satisfaction of the Architect/Bank as per manufacturer's specification. No deduction will be made for any cutting in the film.	1.00	Sq m		
35	Extra Plotter Cutting charges for Frosted films as per direction with all labour & materials to the satisfaction of the Architect/Bank	1.00	Sq m		
36	Supplying and installation Dressing Table with Puffy as follows.	1.00	NO		
	Dressing Table shall have 1'-6" x 4'-0" size 5mm thick mirror with 1 1/2" x 3" T.W frame and 12 mm thick BWR plywood 2'-0" x 6" size with 1 mm thick laminate on top and having polished edges / bottom supported by brass bracket 2 Nos. as directed.				
	Puffy shall be made of using TW member of size 2"x2" and 18 mm th. plywood for seat support. Seat shall be padded with 4" foam covered with hessian cloth and upholstered with Approved shade and quality fabric. Basic price of fabric shall be Rs.400 per R m. Visible wooden support shall be polished. Size of Puffy shall be 1'6"x1'6".				
37	Providing and fixing "Dorma/Ozone/Godrej" or equivalent make door closure.	4.00	NO		
38	Supplying and installation 3'-0" x 1'-9"x 1'-3" height Center Tepoy as follows.	1.00	NO		
	Providing and making open box structure type Tepoy made out of 36 mm (2X18) thick plywood with all over 1.0 mm thick laminate finish provided				

	with beveled & diamond polished edges 12mm thick glass top supported on 75 mm X 25 mm SS studs complete as directed.				
38[a]	Same as above but size 1'-9" x 1'-9" x 1'-3" height for Corner Tepoy	1.00	NO		
39	Providing new sofa as per design by the architect in charge, with Upholstery of Rs. 650 per R m Rubber form (40 density sleep well) to be provided. Work also involve wooden members, complete lacquer polishing as directed.	4.25	R m		
	RECONDITIONING OF FURNITURE WORK				
40	Providing and fixing 1.0 mm thick laminate on any existing laminate surfaces of Tables, Side Tables, , cupboards, paneling by removing existing laminate by Hot Iron. Rate includes applying lacquer polishing on all existing exposed wooden members. Only laminate finished surface area shall be measured for payment	10.00	Sq m		
40[a]	Providing and fixing 1.0 mm thick laminate on any existing laminate surface by fixing 4mm / 6 mm thick MDF board. Rate includes applying lacquer polish on all existing exposed wooden member etc. complete. Only laminate finished surface area shall be measured for payment	15.00	Sq m		
41	Providing and fixing T.W / Steam beach beading patti finished with three or more coats of lacquer polish of approved shade. The item is to be completed in all respect as directed with all labour and materials to the satisfaction of the architect/Bank.				
[i]	Beading patti Size: 1"x 1/2'	15.00	R m		
[ii]	Beading Patti Size: 1.5"x 1/2'	15.00	R m		
[iii]	Beading Patti Size: 2"x 1/2'	20.00	R m		
[iv]	Beading Patti Size: 3"x 1/2'	15.00	R m		
42	Reconditioning of existing sofa by changing Upholstery of Rs. 650 per R m. Rubber form (40 density sleepwell - 4" thick in seat and 3" thick in back) to be provided. Work also involve replacing back cloth and any broken wooden members,	1.00	R m		

	complete lacquer polishing as directed.				
43	Removing, re-fixing and realignment of existing Furniture				
	Removing, Re-fixing and re-alignment of Tables, Side Tables, cupboard, Misc. other furniture to be used from existing premises including polishing and minor repairs and shifting to new premises from old premises. The work also includes transportation charges required from shifting.				
(i)	Shifting and re-laying table, side table, cupboard as per new lay out. Rate also includes removal of electric/ data/telephone connection as per site requirements.				
(ii)	Necessary cutting, modification and repairing if required.				
(iii)	Repairing of drawers and shutter and painting /polishing complete as directed.				
[a]	Table Size 6'-0" x 3'-0" For BM.	1.00	NO		
[b]	Table Size 5'-0" / 5'-6" x 2'-6" For Officer.	2.00	NO		
[d]	Side Table Size 3'-3"/3'-0" x 1'-4"x 2'-6"ht	1.00	NO		
[e]	Side Table Size 3'-3"/3'-0" x 1'-4"x 2'-6"ht	2.00	No		
[f]	Removing and re-fixing of existing storage cupboard+ side credenza with necessary cutting and modification including painting/ polishing etc complete	12.00	Sq m		
44	Replacing of approved make multipurpose lock & handle/sliding channels wherever required etc. complete as directed.				
[a]	Replacing of Existing cupboard locks	5.00	NO		
[b]	Replacing of Existing cupboard handles	5.00	NO		
[c]	Replacing of Existing cupboard stoppers	5.00	NO		
[d]	Replacing of Existing full extension Sliding channel in drawer	5.00	PAIR		
[e]	Replacing of Existing magnet in cupboard shutter	5.00	NO		
[f]	Supplying and fixing metal key board of approved make in table/counter as per design and instructions.	1.00	NO		
[g]	Replacing of Existing Cylindrical Lock with necessary carpentry work	1.00	NO		
45	Providing and fixing glass on table top including beveled & polished edges.etc complete as directed.				
[a]	6 MM THICK	1.00	Sq m		
[b]	8 MM THICK	1.00	Sq m		

	REPAIRING WORK				
46	Providing and Fixing 2 nos sheets of 24"x 36" clear acrylic sheets (poster to be sandwiched in between). Outer sheet is 5 mm thick and beveled crystal edge polished for 3/4" wide at 8-10 degrees on all sides and the Rear sheet is 5 mm thick flat etc complete as directed.	1.15	Sq m		
[a]	Same as above but of size of 18"x 24" (poster to be sandwiched in between)	1.00	NO		
[b]	Supplying and installation suggestion /complain box made from 5 mm thick Acrylic sheet of size 230mm x305mm x 150mm depth with openable hinged shutter and slot for putting suggestions / complain with lockable arrangement as per design and instruction.	1.00	NO		
47	PAINTING WORK				
47[a]	P/A ACRYLIC EMULSION PAINT (PLASTIC PAINT)	1.00	Sq m		
	Providing and applying (with rollers only) Acrylic emulsion paint of required shade and approved make on old/new surface in two or more coats to give an even shade including the preparation of surface for painting, applying FULL primer and putty at all heights complete as per manufacturer's specification and as directed.				
47[c]	P/A SYNTHETIC ENAMEL PAINT	1.00	Sq m		
	Providing and applying synthetic enamel paint at all heights of required shade and approved make on new / old work including scrapping / cleaning and preparation of surfaces for painting, applying primer and putty, with two or more coats of approved first quality enamel.				
	TOTAL COST "A"	Rs.			
Note:					
[a]	In all furniture work, contractor shall make necessary cutout in paneling /partitions / wooden members to facilitate electrical/data caballing and No extra amount shall be paid for this				

[b]	All internal surface (non visible surfaces) shall be provided with the 0.60 mm thick balancing laminate of approved make & shade in the all S.W Counters/Tables/ Credenza, Storage Cup Board etc.				
[B]	BUY BACK OF OLD FURNITURE				
	Dismantling of entire furniture and fixtures from existing premises and buy back of furniture which is not required by Bank, as follows				
1	CASH / S.W COUNTER	3.00	R m		
2	12 mm thick glass partition on S.W Counter	2.32	Sq m		
3	Wooden Partition for Cash Cabin with Aluminium grills	6.87	Sq m		
4	Wooden partition for S.W Counter	1.00	Sq m		
5	Wooden Partition for Server Room/ Manager Cabin & other partition	3.00	Sq m		
6	Wooden Paneling	1.00	Sq m		
	Wooden Table				
7	Table Size 5'-0"x2'-6"+ 1'-6" L-Type	1.00	NO		
8	Table Size 4'-6"x2'-6" + 1'-6" L-Type	1.00	NO		
9	Wooden Side Table 36" x16" x 30"ht	2.00	NO		
10	Low height and Full height Storage	1.00	Sq m		
11	Server Room Table with storage cupboard below top	1.00	R m		
12	Customer Writing Desk	1.00	NO		
	TOTAL COST OF BUY BACK "B"	Rs.			
	SUMMARY				
[A]	FURNISHING WORK	Rs.			
[B]	BUY BACK OF OLD FURNITURE	Rs.			
	NET TOTAL COST [A -B]	Rs.			
	Any extra discounted offered	Rs.			
	Total	Rs.			
In word rupees					